



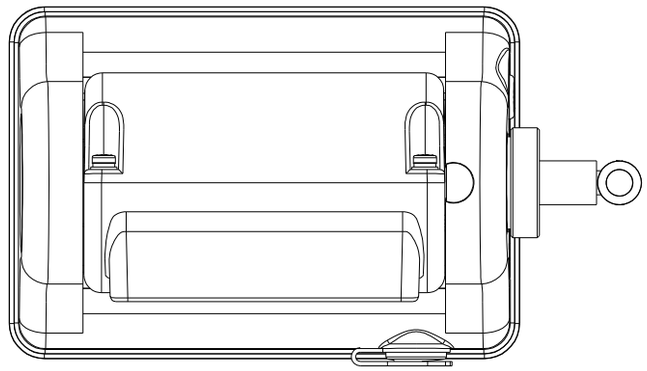


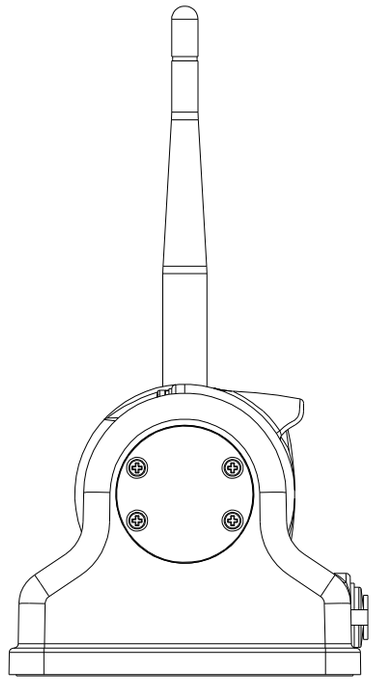

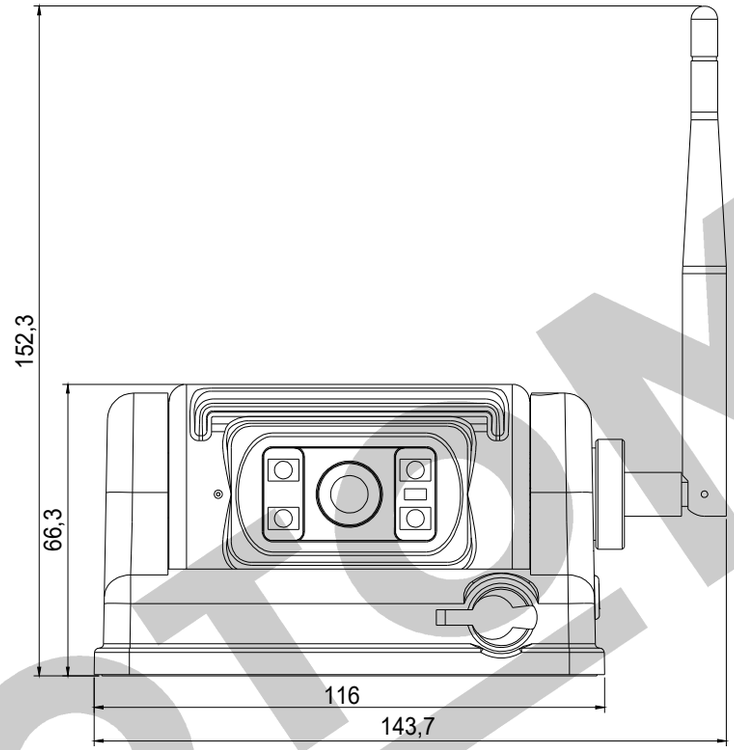

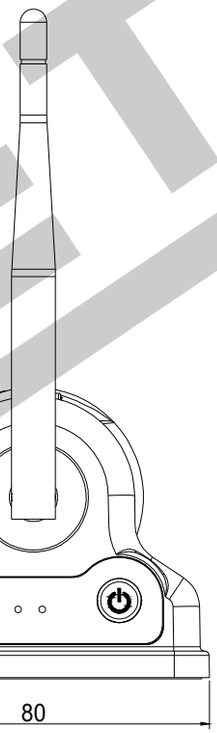

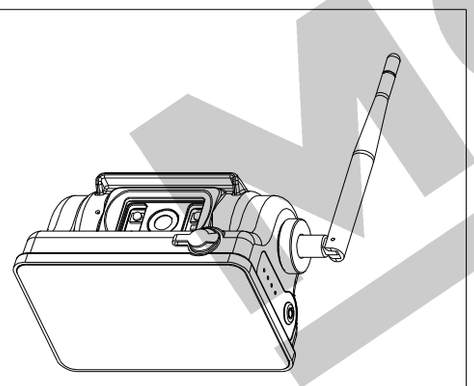

Battery Capacity: 3.6V/6400mAh
Charging Voltage: 5V–12V
Charging Time: 5V/8H, 12V/3H
Charging Current:
5V/1.5A(MAX), 12V/1.5A(MAX)
Discharging Time: 12H (daytime) 5H (night)
Charging Temperature: 0~+40℃
Discharging Temperature: –20~+60°C
Storage Temperature: –20~+60° C
Waterproof Rating: IP69K
Dimension: 116 x 80 x 66 (mm)
Weight: 670g
Sensor: 1/2.9" CMOS SENSOR
Effective Pixels: 1920 x 1080 pixels
AGC: Auto
Signal to Noise Ratio: 38dB

White Balance: Auto
BLC: Auto
Operation Frequency: 2048–2478MHZ
Transmission Distance (barrier free):
300m(20dBm)
Receiving sensitivity: –78dBm
Video Decode: H.264
Transmission power: 10dBm/20dBm/16dBm
Modulation: FHSS
Delay: 170ms
RF Bit Rate: 12Mbps
Minimum Illumination: 0Lux
Night Vision Distance: 8–10m
Audio: Optional
Viewing Angle: 70°/100°/110°130°
IR–cut function: Optional
Charging adapter: No

all	ⓞ	original drawing	07.05.25	M.Sz
pos.	ind.	kind of modification	date	name

MOTOMETER	date	07.05.2025
	sig.	P.Koffler
	rev.	
for dimensions without tolerance indication: DIN ISO 2768 c	pass.	P.Koffler - 01.12.25

customer number:

description:

WiFi camera

with battery and magnet

scale:	drawing number:
-	673 001 0002

MOTOMETER