



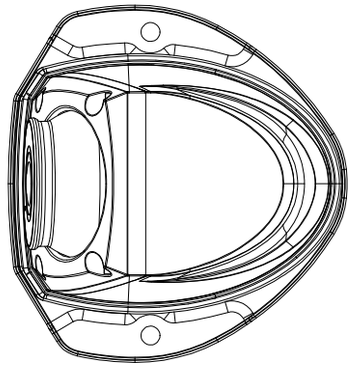

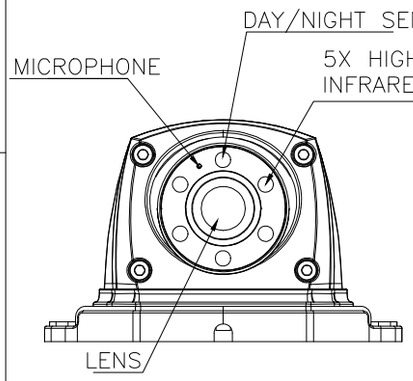

4–PIN FEMALE
MATING FACE

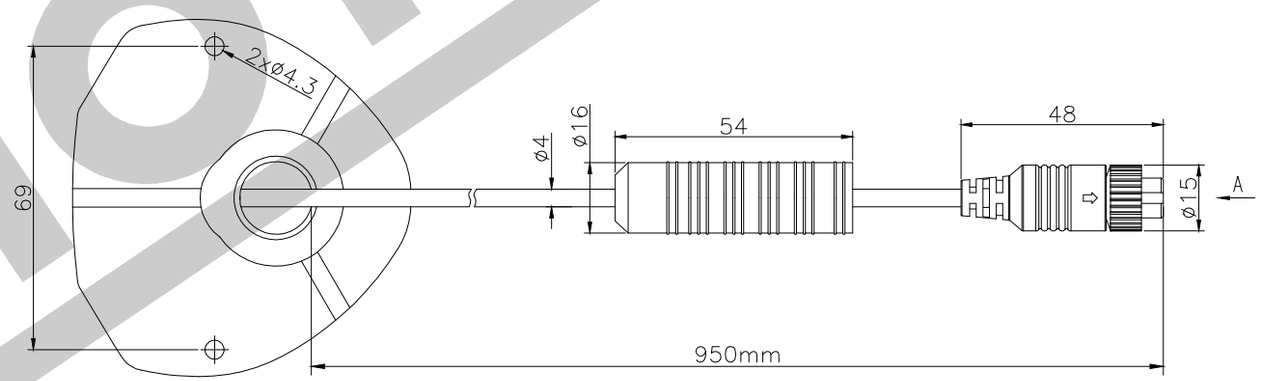


Image Device	1/2.6" CMOS
Frame Rate	30/60FPS
Effective Pixels	1920 (H) x 1280 (V)
Pixel Size	3.0 µm x 3.0 µm
Scanning System	Progressive Scanning
Sync. System	Internal
Resolution	1280P/1080P
Video Out	1.0Vp–p, 75Ohm
Gamma Consumption	0.45
AGC	Auto
Dynamic rang	120dB–HDR3/140dB–HDR4
White Balance	Auto
Electronic Shutter	1/30~1/50,000 Seconds
BLC	Auto
Operating Temperature	-40℃ ~ 105℃, RH95%MAX.
Storage Temperature	-50℃ ~110℃, RH95%MAX.
Waterproof Rating	IP69K
Power Supply	DC12V
Viewing Angle	170°
Minimum Illumination	0.1 Lux
Image mode	Mirror

all	ⓐ	original drawing	17.10.25	M.Sz
pos.	ind.	kind of modification	date	name

MOTOMETER

date	20.05.2025
sig.	P.Koffler
rev.	
pass.	P.Koffler - 03.12.25

for dimensions without tolerance indication: DIN ISO 2768 mittel

customer number:

description:

Camera 90°

Cable 950 mm

scale:	drawing number:
-	673 001 0006

MOTOMETER