
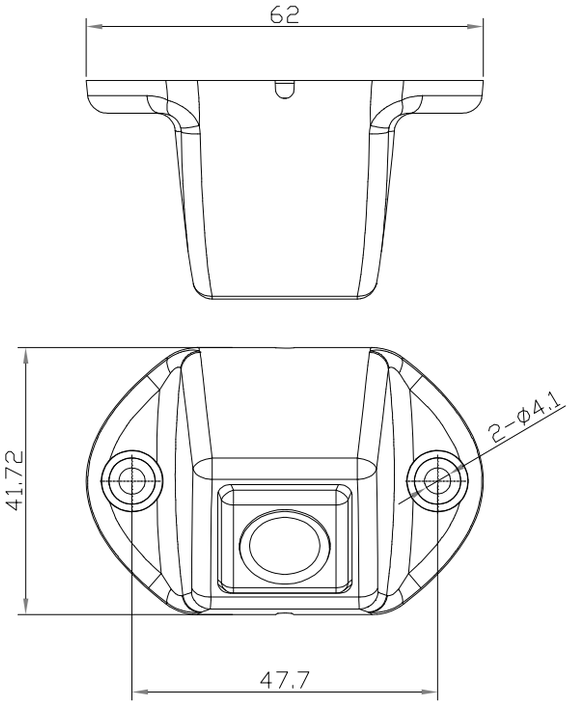
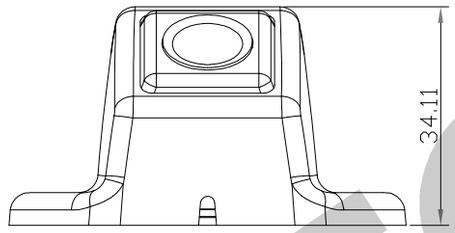
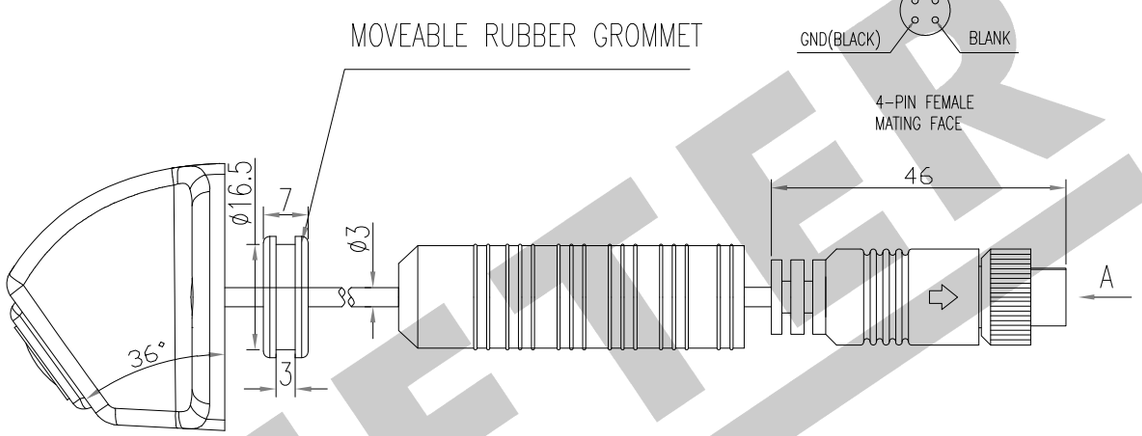


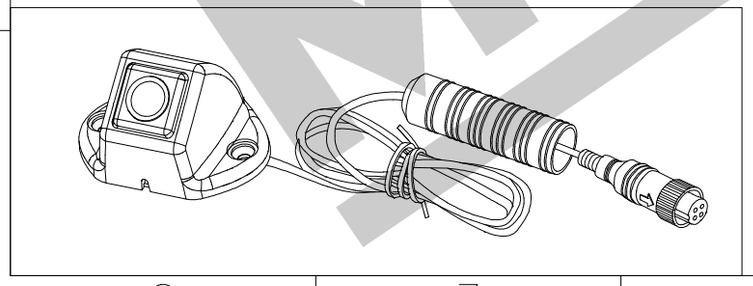

Effective Pixels: 1920 (H) X 1080 (V)
Pixel Size: 2.8um x 2.8um
Scanning System: Progressive Scanning
Sync. System: Internal
Video Output: 0.9 Vp-p, 750hm
Gamma Consumption: 0.45
AGC: Auto
Dynamic Range: 81dB
White Balance: Auto
BLC: Auto
Frame Rate: 25/30fps
Operating Temp. & Humidity: -20°C ~ 70°C, RH95%MAX.
Storage Temp. & Humidity: -30°C ~ 80°C, RH95%MAX.
Minimum Illumination: 0.01Lux
Power Supply: DC12V
Waterproof Rating: IP69K
Audio: No
Lens: f =1.99 mm/2.3mm
Viewing Angle: 170°/150°
Anti-vibration: ISO 16750-3 2012 (5.9G)

| pos. | ind. | kind of modification | date | name |
|---|---|---|---|---|
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |

MOTOMETER

| | |
|---|---|
| date | 19.05.2025 |
| sig. | P.Koffler |
| rev. | |
| pass. | |

for dimensions without tolerance indication: DIN ISO 2768 c

customer number:

description:

# Camera black
## with wide angle

| scale: | drawing number: |
|---|---|
| - | 673 001 0009 |

MOTOMETER