



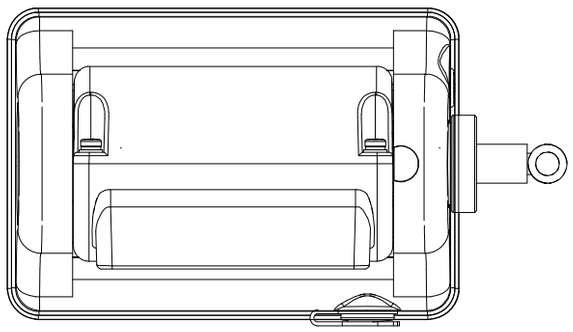



Battery Capacity	3.6V/6400mAh
Charging Voltage	5V–12V
Charging Time	5V/8H, 12V/3H
Charging Current	5V/1.5A(MAX), 12V/1.5A(MAX)
Discharging Time	12H (daytime) 5H (night)
Charging Temperature	0~+40℃
Discharging Temperature	–20~+60℃
Storage Temperature	–20~+60℃
Waterproof Rating	IP69K
Dimension	116 x 80 x 66 (mm)
Weight	670g
Sensor	1/2.9" CMOS SENSOR
Effective Pixels	1920 x 1080 pixels
AGC	Auto
Signal to Noise Ratio	38dB
White Balance	Auto
BLC	Auto
Operation Frequency	2048–2478MHZ
Transmission Distance (barrier free)	300m(20dBm)
Receiving sensitivity	–78dBm
Video Decode	H.264
Transmission power	10dBm/20dBm/16dBm
Modulation	FHSS
Delay	170ms
RF Bit Rate	12Mbps
Minimum Illumination	0Lux
Night Vision Distance	8–10m
Audio	Optional
Viewing Angle	70°/100°/110°130°
IR–cut function	Optional
With charger adapter for socket	Yes

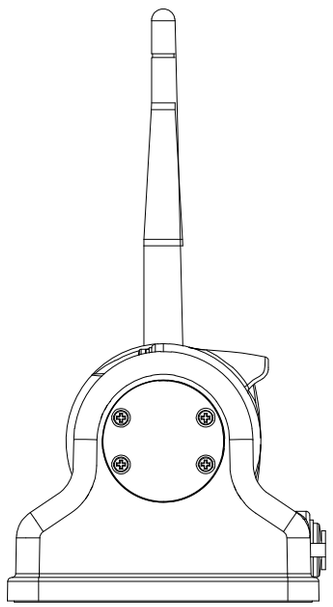

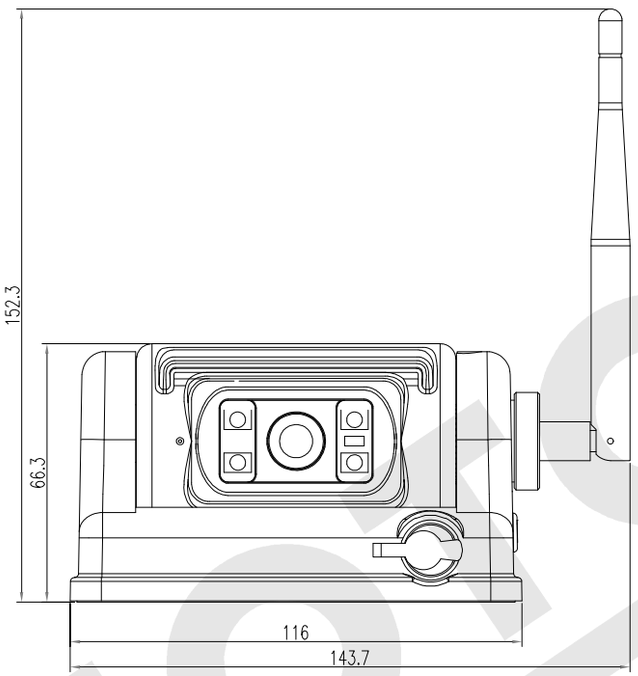

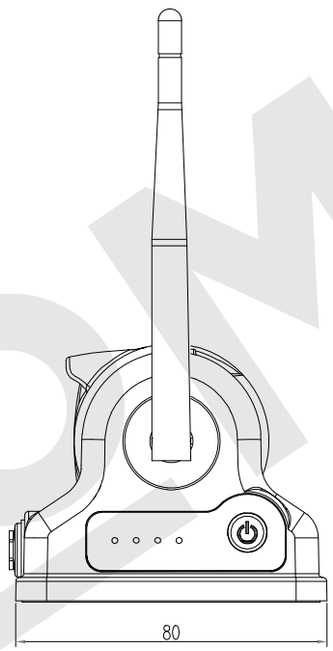

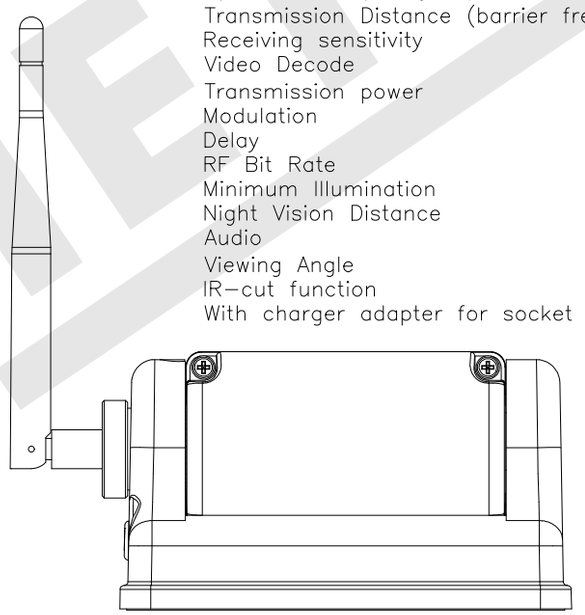

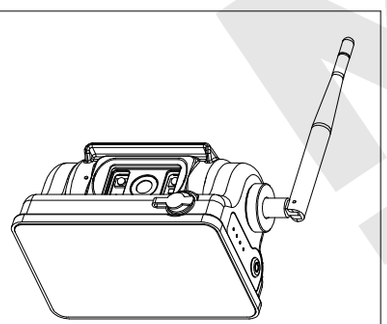

all	ⓐ	original drawing	19.09.25	M.Sz
pos.	ind.	kind of modification	date	name

MOTOMETER

date	19.09.25
sig.	M.Schulz
rev.	
pass.	P.Koffler - 02.12.25

for dimensions without tolerance indication: DIN ISO 2768 c

customer number:

description:

Wifi Camera
with battery for display

scale: –

drawing number: 6730010019

MOTOMETER