



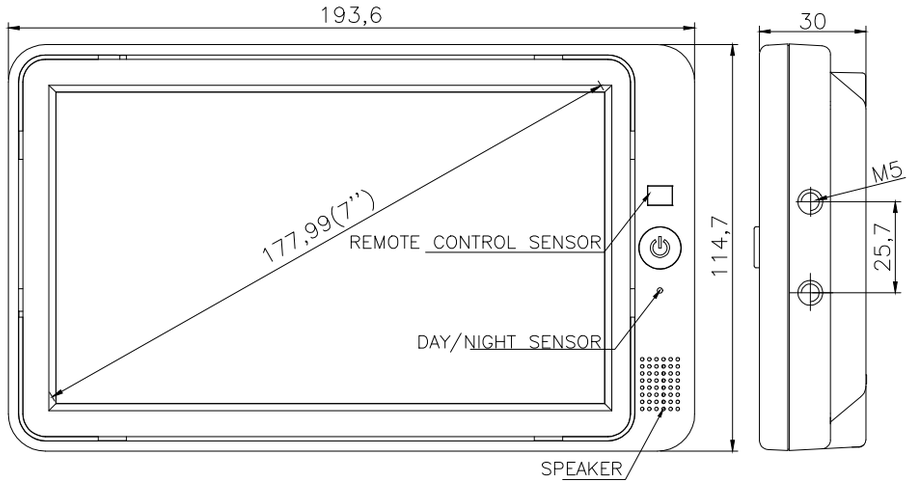


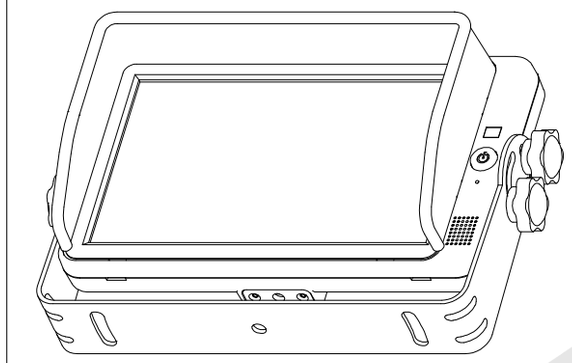



Video input	Max.4CH×1080P@25fps/1080P@30fps
Display mode	2D/3D
Resolution	1024 x 3 (RGB) x 600
Frame Rate	25/30
Storage	Max. 2×512GB SD card
Compressed encoding	Max. 4CH×1080P H.264 encoding
Code stream	4MB/2MB
Power supply	10–32V
Operating voltage range of external trigger signal	10–32V
Operating current	<2A/12V
Operating temperature	–20°C ~ 70°C
Storage temperature	–40°C ~85°C
Operating humidity	10%–90%

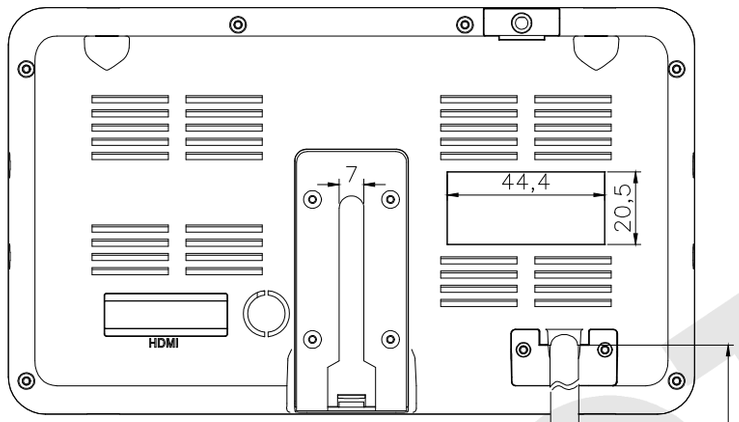

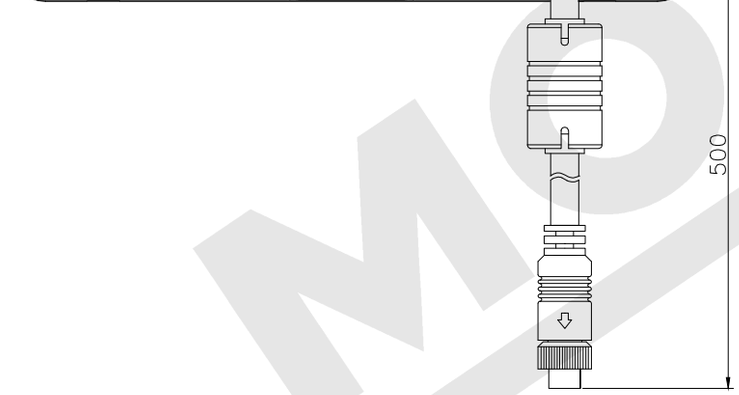

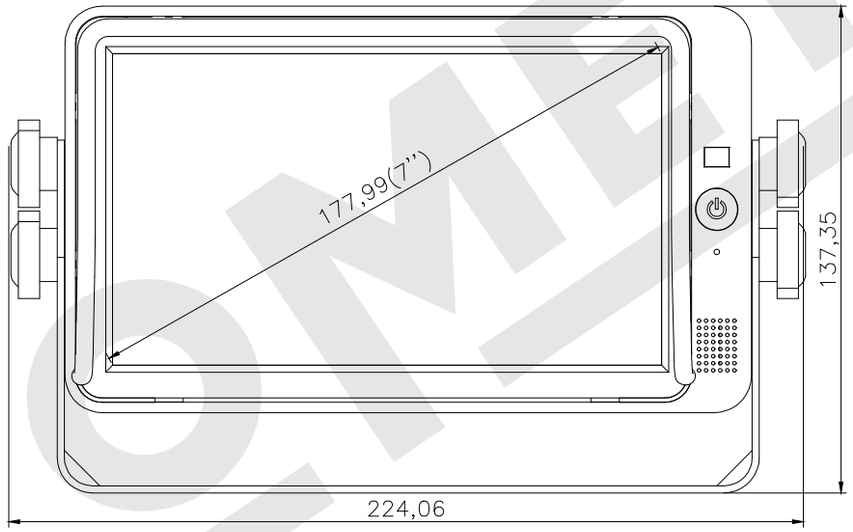

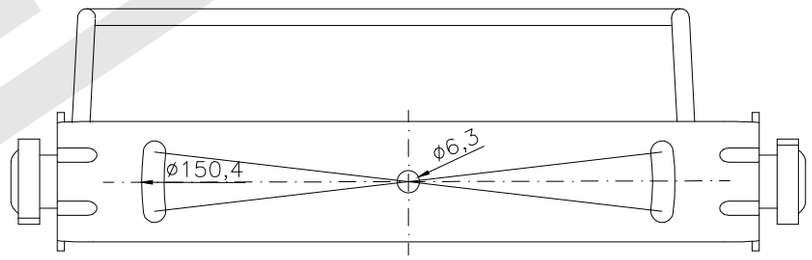

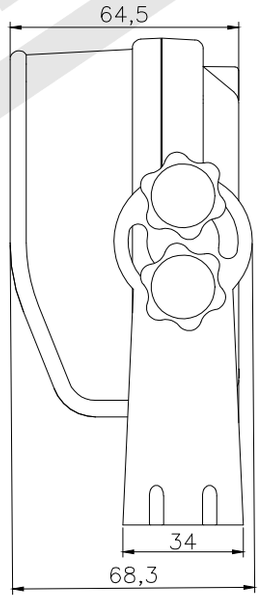

all	ⓐ	original drawing	26.11.25	M.Sz
pos.	ind.	kind of modification	date	name

MOTOMETER	date	20.10.25	
	sig.	M.Schulz	
	rev.		
for dimensions without tolerance indication: DIN ISO 2768 c	pass.	P.Koffler - 05.12.25	

customer number:

description:

Display 7”

scale:	drawing number:
–	6730020003

MOTOMETER