



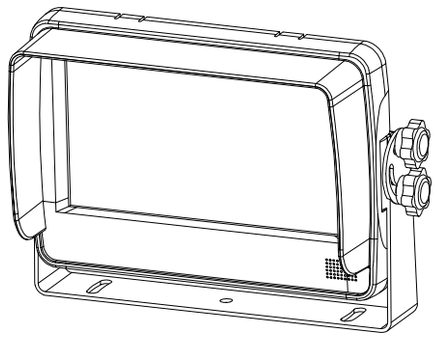


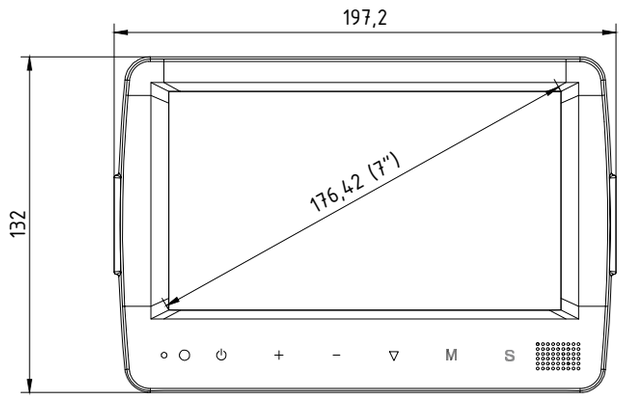

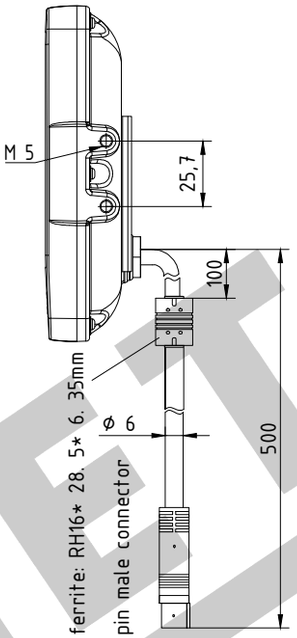


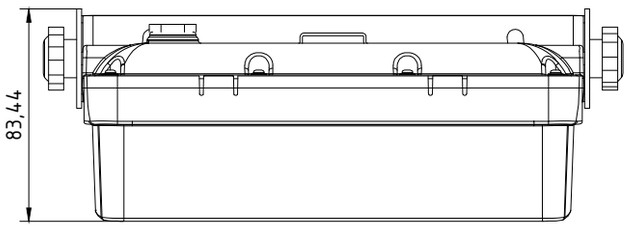






LCD Dimension:	7"							
Resolution:	1024x 3 (RGB) x600							
Contrast:	700:1							
Brightness:	650cd/m²							
Viewing Angle:	U:85 / D:85, R/L:85							
Aspect Ratio: 16:9								
Channel:	4 channels							
Operating Frequency:	2408MHz ~ 2478MHz(ISM band)							
Receiving Sensitivity:	-78dBm							
Transmission Power:	FCC≤26dBm							
	CE≤20dBm							
	MIC≤10dBm							
Decompression Form:	H.264							
Modulation:	FHSS							
Delay:	130ms							
Transmission Distance:	FCC≤300 M							
	CE≤200 M							
	MIC≤60 M							
System Format:	PAL / NTSC							
Power Supply:	DC 10-32V							
Power Consumption:	Max.10W							
Loudspeaker:	1.5W/8Ω							
Operating Temp. & Humidity:	-20~+70°C,RH90%MAX							
Storage Temp. & Humidity:	-30~+80°C,RH90%MAX							
Protection class:	IP66 Shell							
Touchscreen	Yes							

Cable length is adapted to customer requirements,
Standard length 0,5m

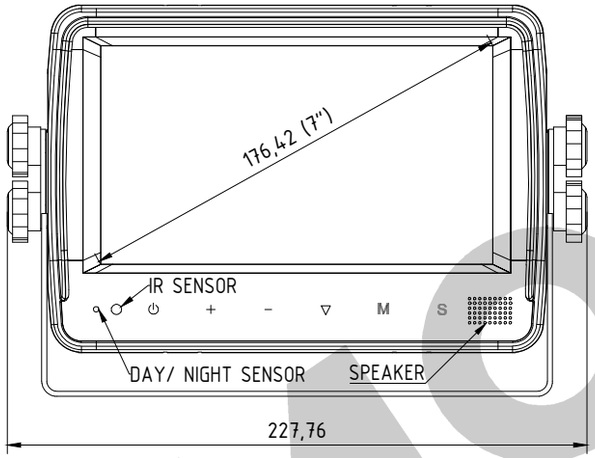

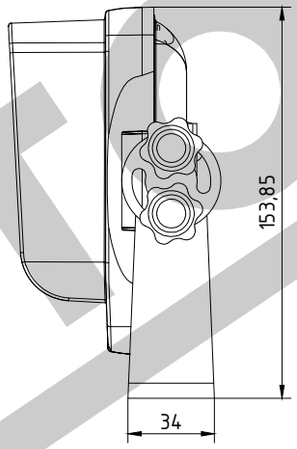

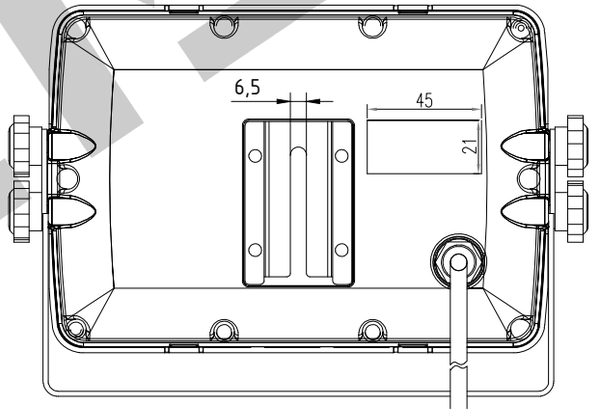


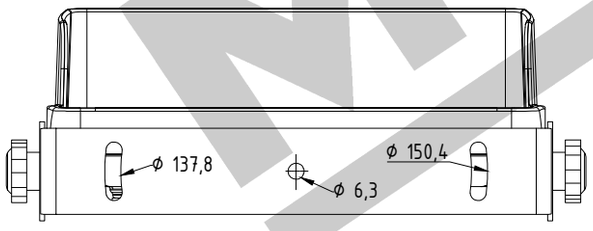

7P 2.0 housing

8P male	1	2	3	4	5	6	7	8
color	red	black/ Shield	brown	blue	purple	green	yellow	/
Description	power	GND	BA	RH	LH	FF	Video -out	/

red
black/Shield
green
purple
blue
brown
yellow



pos.	ind.	kind of modification	date	name

MOTOMETER

date	07.05.2025
sig.	P.Koffler
rev.	
pass.	P.Koffler - 05.12.25

for dimensions without tolerance indication: DIN ISO 2768 v

customer number:

description:

Display 7" WiFi

Waterproof/ Touchscreen

scale: -

drawing number: 673 002 0005

MOTOMETER