




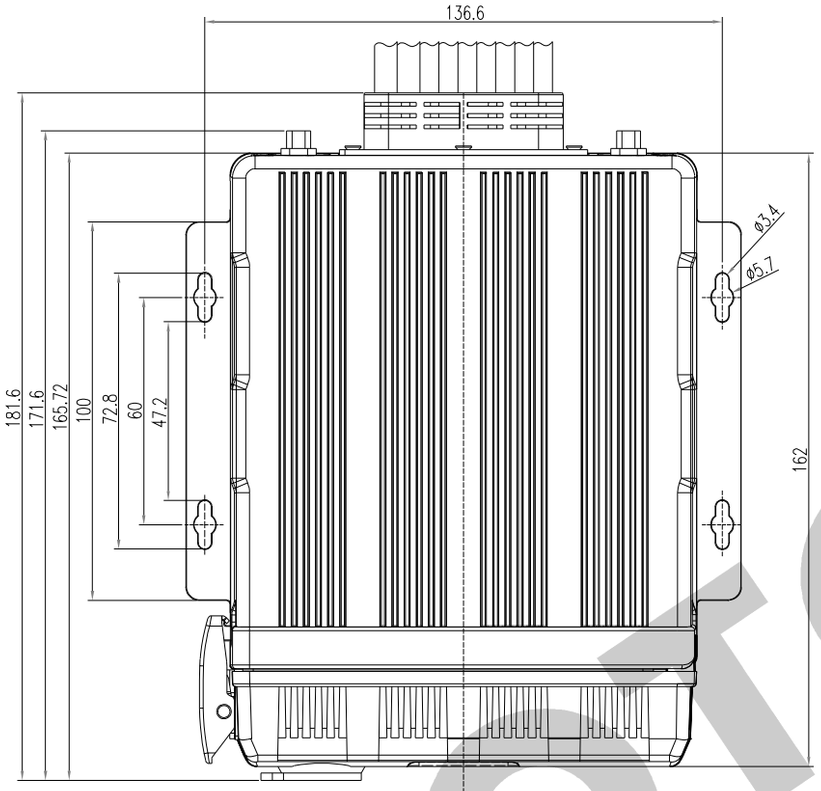

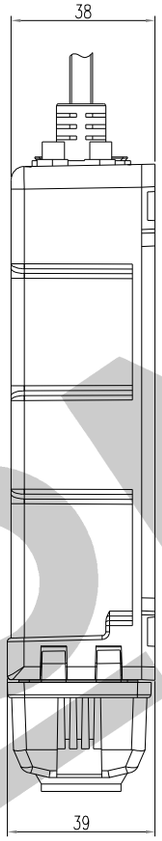

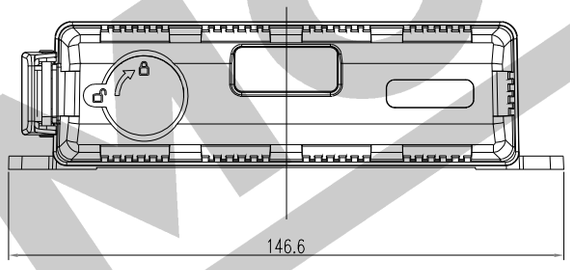



Video input: Max.8CHx1080P AHD (25/30)FPS
Video output: 1-CH 1080P AHD/VGA/CVBS(D1)/RTSP
Trigger input: 1-CH backward trigger,
1-CH let trigger,
1-CH right trigger, trigger 1/2/3
are extended input triggers for user-defined setting
TV System: PAL /NTSC
Storage: Max. 1x512G SD card+1x2T SSD card
Waterproof rating: IP69K
Language: English,French,German. Dutch.Chinese
Power supply: 10-32V
Operating current: <2A/12V
Operating temperature: -20°C ~ 70°C
Storage temperature: -40°C ~ 85°C
Operating humidity: 10%-95%


Cable length is adapted to customer requirements,
Standard length 0,5m


7P 2.0 housing
ferrite: RH16* 28. 5* 6. 35mm

8P pin male connector

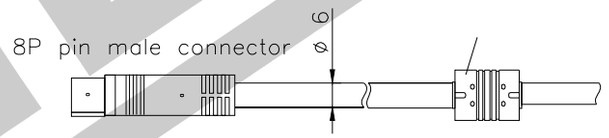



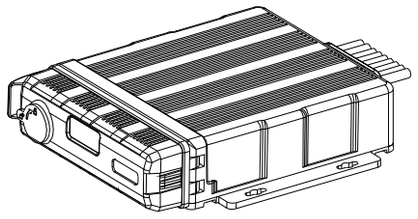

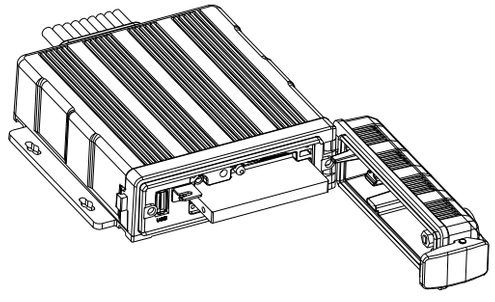

all	ⓞ	original drawing	13.05.25	M.Sz
pos.	ind.	kind of modification	date	name

MOTOMETER

date	13.05.2025
sig.	
rev.	
pass.	P.Koffler - 13.01.2026

for dimensions without tolerance indication: DIN ISO 2768 c

customer number:

description:

360° Control unit

for 8 channels

scale:	drawing number:
-	673 003 0002

MOTOMETER