


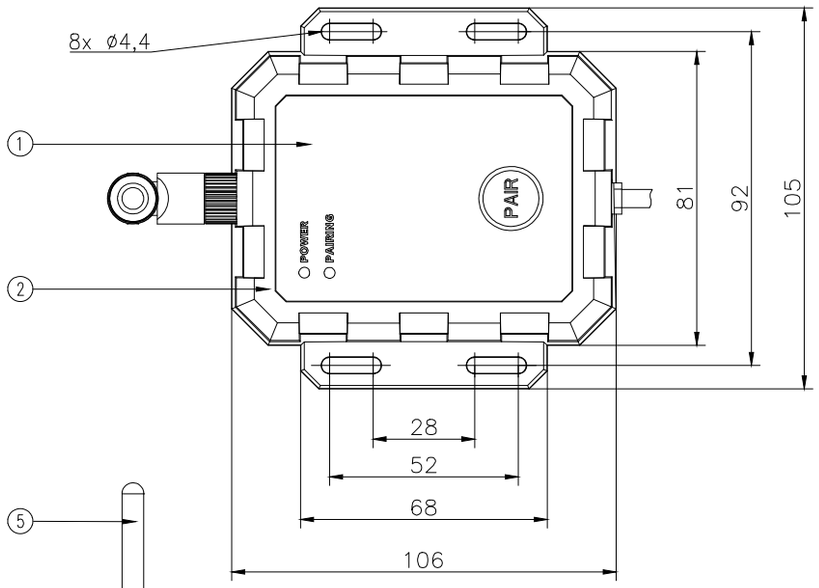


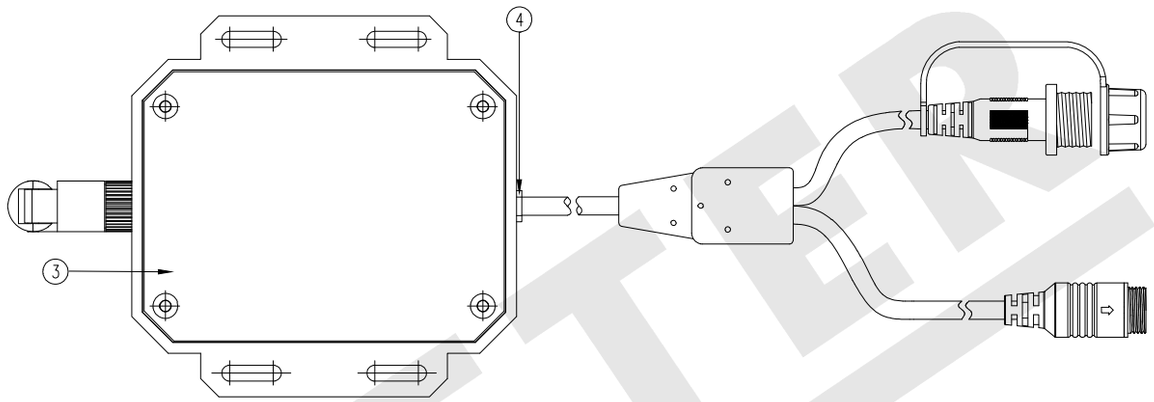

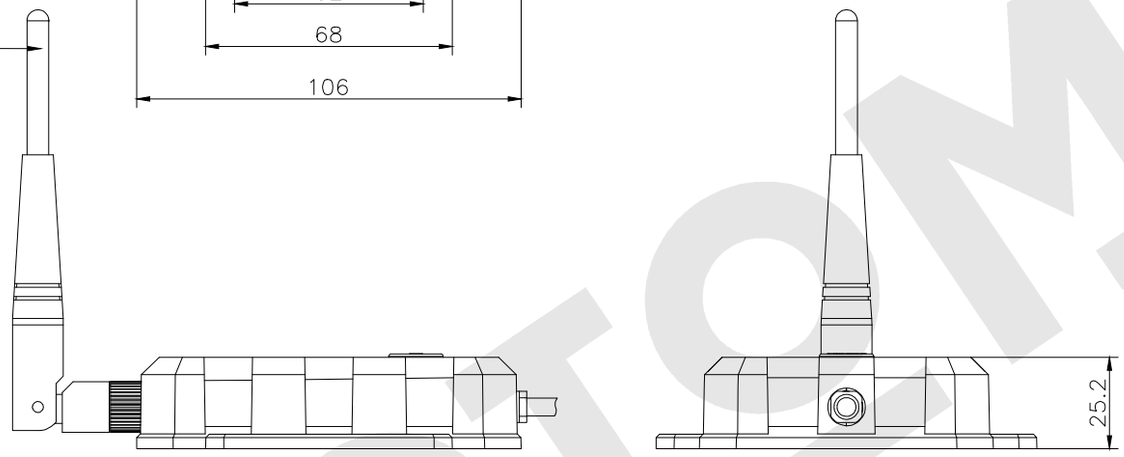

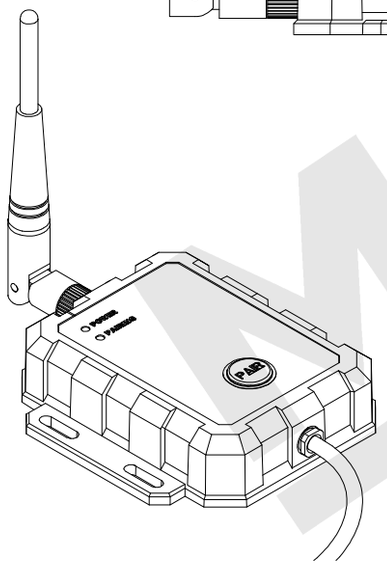

Power Supply	DC 10–32V
Video Input	CVBS / AHD720P/AHD1080P
Operating Frequency	2400 – 2483.5 MHz
Transmission Distance	100M/200M/300M
Decompression Form	H.264
Transmission Power	10dBm/17dBm/20dBm
RF Bit Rate	MAX.12Mbps
Modulation	FHSS
Delay	200ms
Operating Temp. & Humidity	−20°C ~ +70°C RH90%MAX
Storing Temp. & Humidity	−30°C ~ +80°C RH90%MAX
Connector	4 Pin

Waterproof vehicle wireless transmitter

pos.	ind.	kind of modification	date	name
all	@	original drawing	17.10.25	M.Sz

MOTOMETER

date	17.10.25
sig.	M.Schulz
rev.	
pass.	P.Koffler - 12.01.2026

for dimensions without tolerance indication: DIN ISO 2768 c

customer number:

description:

wireless transmitter

scale: -

drawing number: 6730040102

MOTOMETER